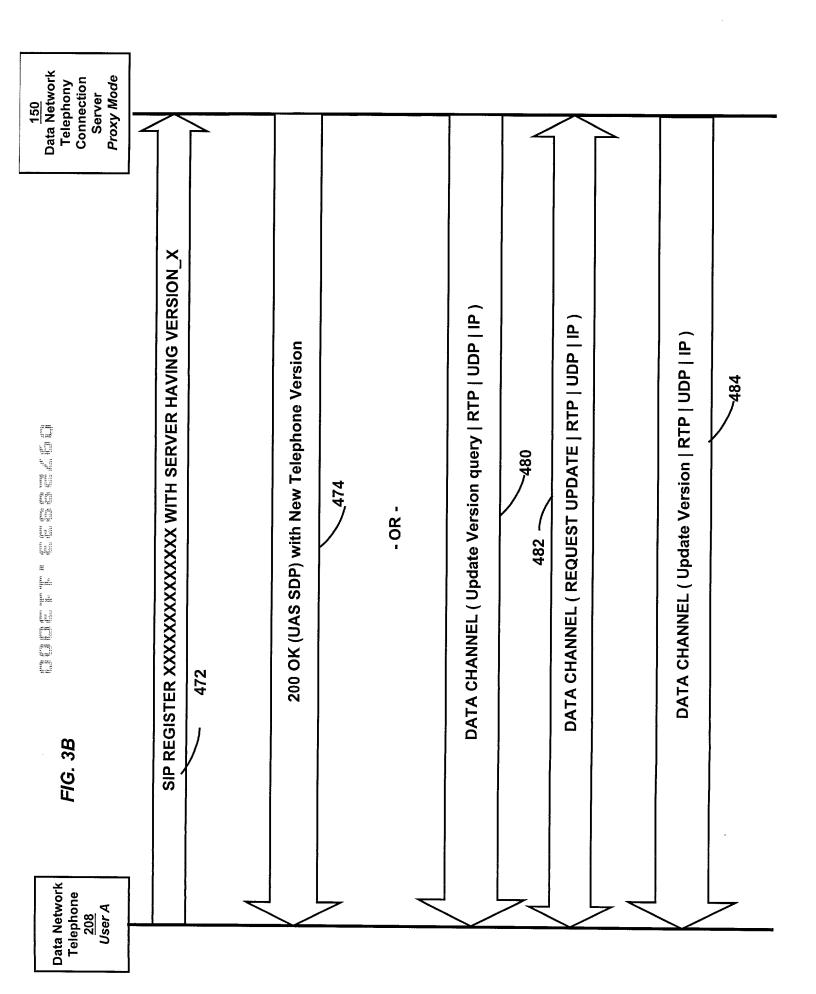
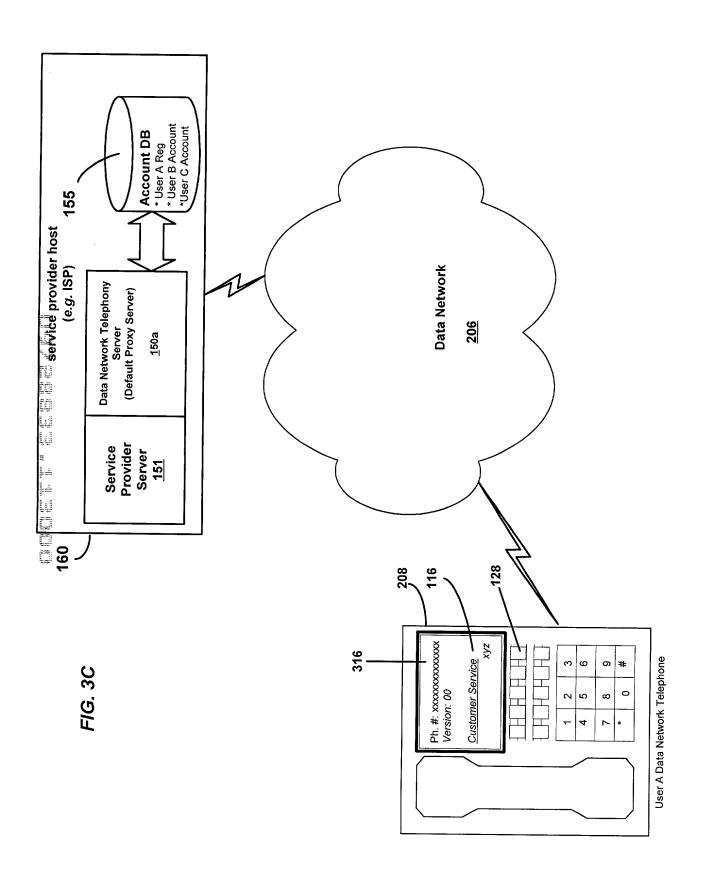


FIG. 2B

And then then the other also the few from the first and the first first first







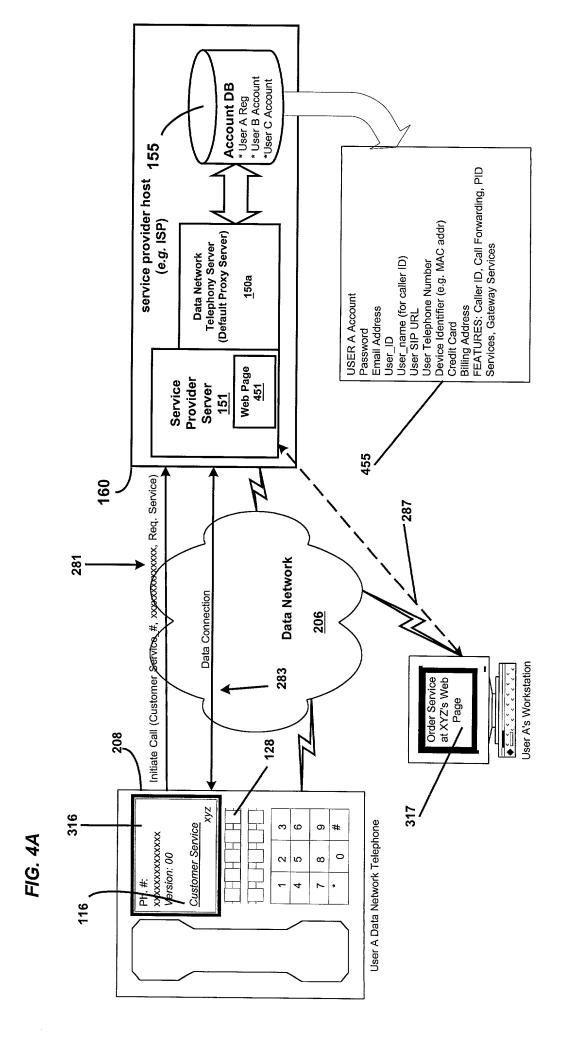


FIG. 4B

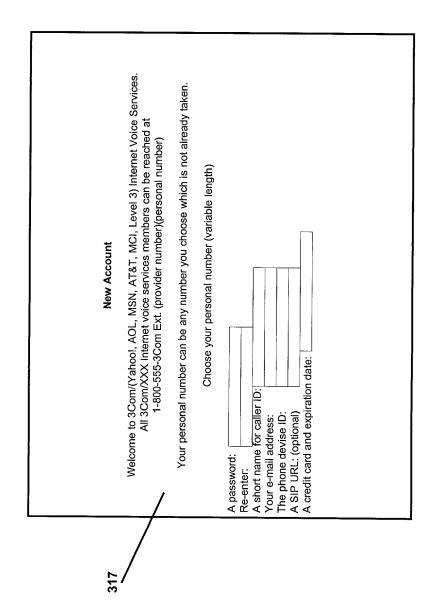

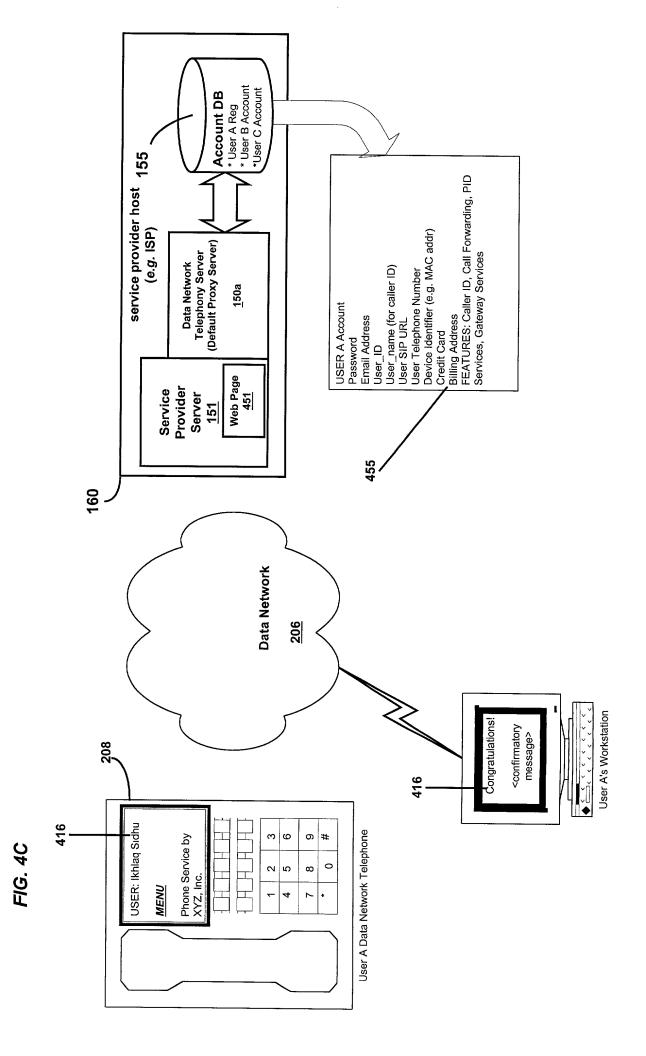

Congratulations!

An E-mail has been sent to you. You must reply to that e-mail to activate this account. You should print this page and keep it for future reference.

- Ext. 200 634-0610 + Your new "personal" phone number is 1-800-5553Com
- Your SIP address (for Palm PDA based dialing) is ikhlaq_sidhu.3com.com@xxx.com

Some Frequently asked questions:

- How do I dial another 3Com / XXX Internet phone user?
- 4: You only need to dial the extension number. For example other 3Com/(...) users with he same provider code (200) can call you at 634-0610. To call a user with another (say 202) provider number, you must dial 1-202-634-0610.
- Q: How do I dial traditional people phones? A: Dial 9 to get out of the system. I.e. dial 9, 1800-CALL ATT to use a AT&T calling card.
- Q: How are calls billed? A: There is no extra charge for calls to other 3Com/XXX subscribers.

Telephone Net. International calls over the public network are billed to your credit card on There is no extra charge to make domestic long distance calls over the Public a per call basis.

- Q: How do I set speed dials and other advanced features?
- Goto www.3comvoice.com/ikhlaq_sidhu.3com.com@xyz.com and enter your password ZZZ.
- Q: How do I use speed dialing from my Palm PDA?
- A: The proxy server option must be set to proxy@xxx.com. Any subscriber with an email address can be auto dialed by.

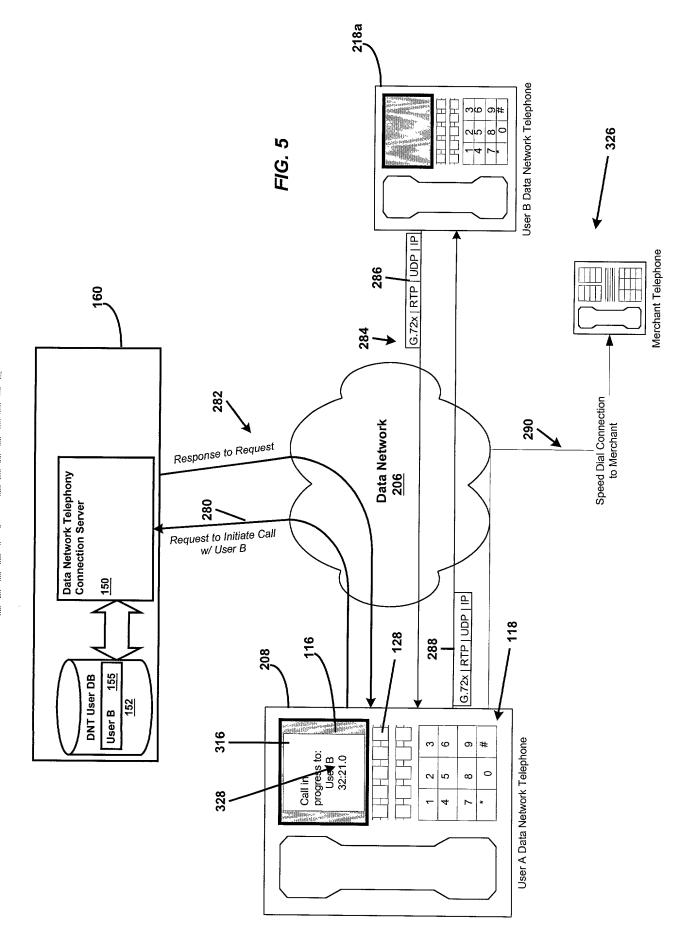


FIG. 6A

